

# INNOLUX DISPLAY CORPORATION

## MT215DW01 V.1 LCD MODULE SPECIFICATION

---

( ) Preliminary Specification

(●) Final Specification

Customer	
----------	--

Approved by	Checked by	Prepared by

**Innolux Display Corporation,**

No.160 Kesyue Rd., Chu-Nan Site, Hsinchu Science Park,

Chu-Nan 350, Miao-Li County, Taiwan

Tel: 886-37-586000

Fax: 886-37-586060

**Document Number: MT215DW01 V.1 –DR4-03**



# INNOLUX DISPLAY CORPORATION

## MT215DW01 V.1 LCD MODULE SPECIFICATION

Department		Prepared by	Checked by
MKT			
PD	EE		
	ME		
TD			
RA			

Innolux Display Corporation

Document Number: MT215DW01 V.1-DR4-03

**Version: 1.0**

InnoLux copyright  
All rights reserved,  
Copying forbidden.

## Record of Revision

Version	Revise Date	Page	Content
1.0	2009/10/19		First edition to all Final-Spec.
2.0	2009/12/18	12	T6 <sub>Max</sub> update to 50ms
	2009/12/18	15	Baklight unit parameter update
3.0	2009/01/25	7	Rear view of backlight update
	2009/01/25	13	Backlight unit parameter update



SPEC NO. MT215DW01 V.1

PAGE 4/24

**Contents:****A. General Specification**

5

**B. Electrical Specifications**

6

1. Pin assignment

6

2. Absolute maximum ratings

8

3. Electrical characteristics

9

a. Typical operating conditions

9

b. Display color vs. input data signals

12

c. Input signal timing

13

d. Display position

14

e. Backlight driving conditions

14

**C. Optical specifications**

16

**D. Reliability test items**

19

**E. Safety**

20

**F. Display quality**

20

**G. Handling precaution**

20

**H. Label**

21

**I. Mechanical drawings**

23



SPEC NO. MT215DW01 V.1

PAGE 5/24

**A. General specification**

NO.	Item	Specification	Remark
1	Display resolution (pixel)	1,920(H) X 1080(V), Full HD resolution	
2	Active area (mm)	476.64(H) X268.11 (V)	
3	Screen size (inch)	21.53 inches diagonal	
4	Pixel pitch (mm)	0.24825(H) X0.24825 (V)	
5	Color configuration	R, G, B vertical stripe	
6	Overall dimension (mm)	495.6(W) X 292.2(H) X 9.8(D) (typ.)	
7	Color Gamut	70%	
8	Weight (g)	1600 (Max)	
9	Surface treatment	Anti-Glare, Hard coating (3H)	
10	Input color signal	8 bit LVDS	
11	Display colors	16.7M (6 bit with Hi-FRC)	
12	Optimum viewing direction	6 o'clock	
13	Backlight	White-LED	
14	Others	RoHS & TCO 5.0& Halogen Free compliance	



## B. Electrical specifications

### 1. Pin assignment


#### Connector

FOXCONN GS23302-0011 R-7F or mechanical interface equivalent connector.

Pin No	Symbol	Description
Frame	VSS	Ground
1	RXinO0-	-LVDS differential data input, Chan 0-Odd
2	RXinO0+	+LVDS differential data input, Chan 0-Odd
3	RXinO1-	-LVDS differential data input, Chan 1-Odd
4	RXinO1+	+LVDS differential data input, Chan 1-Odd
5	RXinO2-	-LVDS differential data input, Chan 2-Odd
6	RXinO2+	+LVDS differential data input, Chan 2-Odd
7	VSS	Ground
8	RXOC-	-LVDS differential Clock input (Odd)
9	RXOC+	+LVDS differential Clock input (Odd)
10	RXinO3-	-LVDS differential data input, Chan 3-Odd
11	RXinO3+	+LVDS differential data input, Chan 3-Odd
12	RXinE0-	-LVDS differential data input, Chan 0-Even
13	RXinE0+	+LVDS differential data input, Chan 0-Even
14	VSS	Ground
15	RXinE1-	-LVDS differential data input, Chan 1-Even
16	RXinE1+	+LVDS differential data input, Chan 1-Even
17	VSS	Ground
18	RXinE2-	-LVDS differential data input, Chan 2-Even
19	RXinE2+	+LVDS differential data input, Chan 2-Even
20	RXEC-	-LVDS differential Clock input (Even)
21	RXEC+	+LVDS differential Clock input (Even)
22	RXinE3-	-LVDS differential data input, Chan 3-Even
23	RXinE3+	+LVDS differential data input, Chan 3-Even
24	VSS	Ground
25	NC	No Connection
26	NC	No Connection
27	NC	No Connection
28	VCC	+5.0V power supply
29	VCC	+5.0V power supply
30	VCC	+5.0V power supply
Frame	VSS	Ground

SPEC NO. MT215DW01 V.1

PAGE 7/24

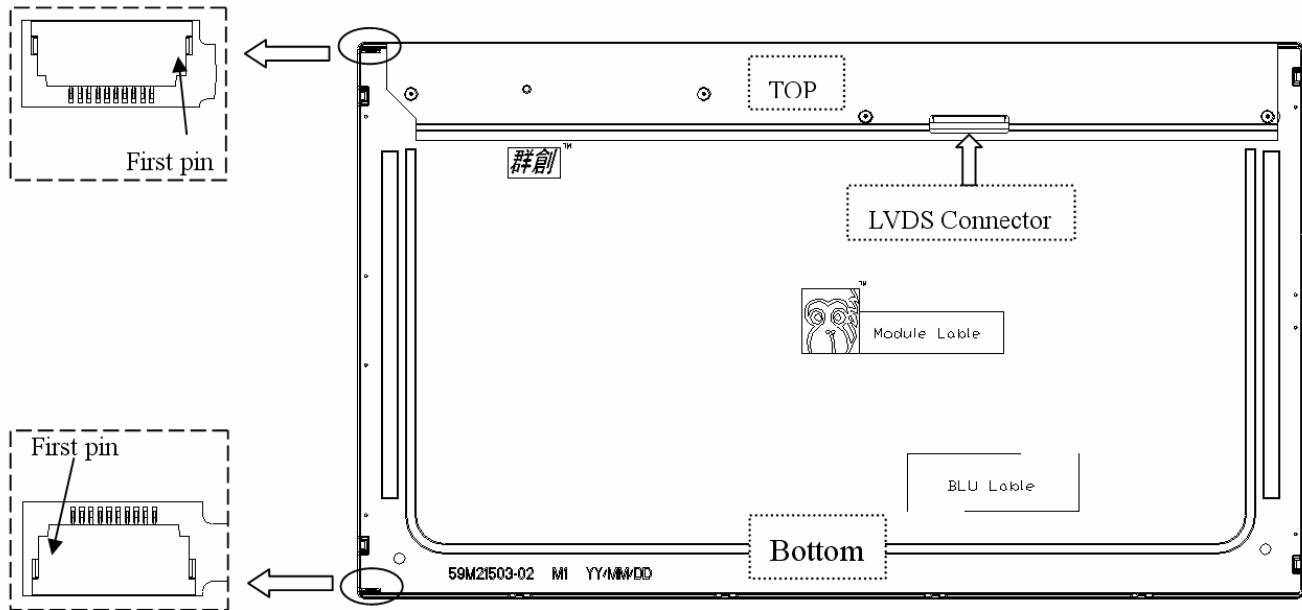**Rear View of LCM**

### 1.2. Recommend Connector for Backlight Unit

This connector is mounted on the monitor system board for LED light-bar FFC mating.

Connector Name/Designation	Match Connector
Manufacturer	Entery INDUSTRIAL CO.,LTD
Mating type part number	7080-Q10N-00R

SPEC NO. MT215DW01 V.1

PAGE 8/24

### 1.3 Light-bar Connector Pin Assignment

Upper Light-bar Connector Pin Assignment:

Pin No	Symbol	Description
1	IRLED1	LED current sense for string 1
2	IRLED1	LED current sense for string 1
3	IRLED2	LED current sense for string 2
4	VLED	LED power supply
5	VLED	LED power supply
6	VLED	LED power supply
7	VLED	LED power supply
8	IRLED2	LED current sense for string 2
9	IRLED3	LED current sense for string 3
10	IRLED3	LED current sense for string 3

Lower Light-bar Connector Pin Assignment:

Pin No	Symbol	Description
1	IRLED1	LED current sense for string 1
2	IRLED1	LED current sense for string 1
3	IRLED2	LED current sense for string 2
4	VLED	LED power supply
5	VLED	LED power supply
6	VLED	LED power supply
7	VLED	LED power supply
8	IRLED2	LED current sense for string 2
9	IRLED3	LED current sense for string 3
10	IRLED3	LED current sense for string 3



SPEC NO. MT215DW01 V.1

PAGE 9/24


## 2. Absolute maximum ratings

Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power voltage	$V_{CC}$	-0.3	-	6.0	V	At 25°C
Input signal voltage	$V_{LH}$	-0.3	-	4.3	V	At 25°C
Operating temperature	$T_{OP}$	0	-	50	°C	Note 1
Storage temperature	$T_{ST}$	-20	-	60	°C	Note 2

Note 1: The relative humidity must not exceed 90% non-condensing at temperatures of 40°C or less.

At temperatures greater than 40°C, the wet bulb temperature must not exceed 39°C.

Note 2: The unit should not be exposed to corrosive chemicals.

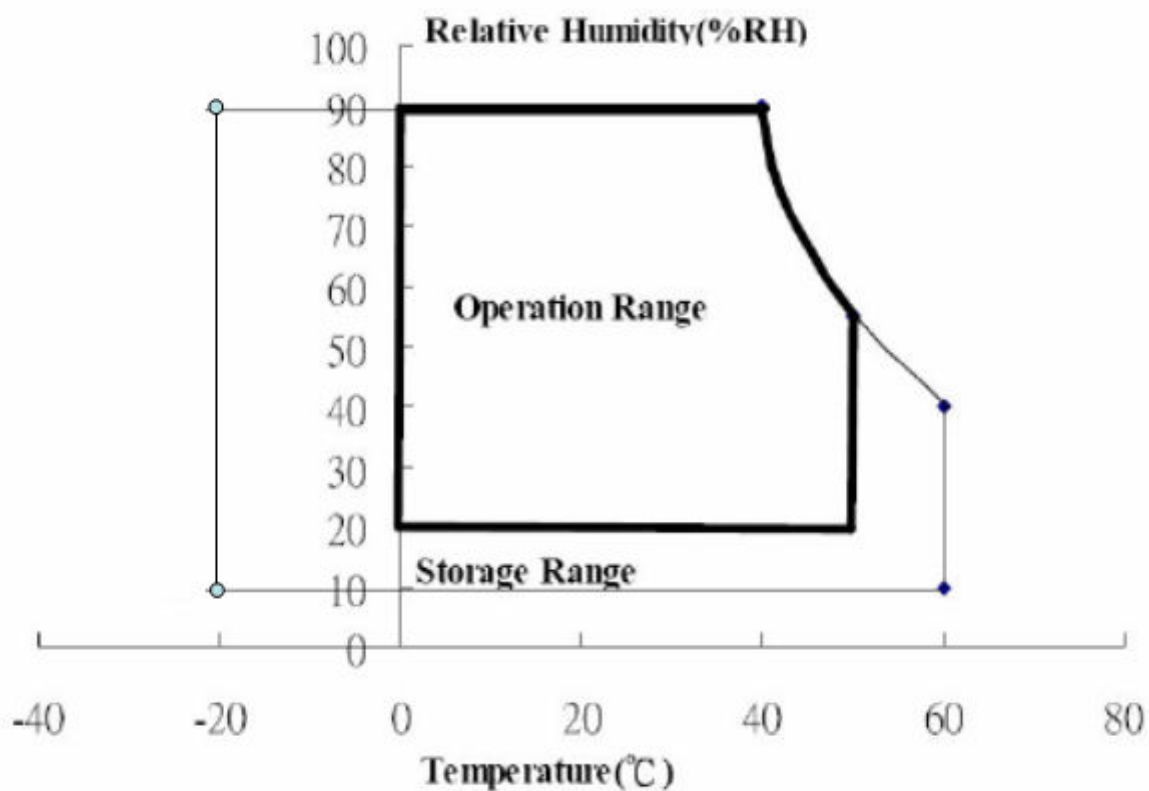

SPEC NO. MT215DW01 V.1

PAGE 10/24

## 3. Electrical characteristics

## a. Typical operating conditions

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Input Voltage		$V_{CC}$	4.5	5	5.5	V	
Permissive Power Input Ripple		$V_{RF}$	-	-	0.15	Vp-p	
Input Current	Black	$I_{CC}$	-	1000	1300	mA	Note 1
	White	$I_{CC}$	-	700	1000		Note 2
	Mosaic	$I_{CC}$	-	900	1200		Note 3
Rush Current		$I_{Rush}$	-	1.6	3	A	Note 4
Logic Input Voltage LVDS: IN+, IN-	Common Mode Voltage	VCM	-	1.2	-	V	
	Differential Input Voltage	VID	100	-	600	mV	
	Threshold Voltage (High)	VTH	-	-	100	mV	Note 5
	Threshold Voltage (Low)	VTL	-100	-	-	mV	Note 5


Note 1 : The specified current is under the  $V_{CC}=5V$ ,  $25^{\circ}C$ ,  $f_v=60Hz$  (frame frequency) condition whereas black pattern is displayed.

Note 2 : The specified current is under the  $V_{CC}=5V$ ,  $25^{\circ}C$ ,  $f_v=60Hz$  (frame frequency) condition whereas white pattern is displayed.

Note 3 : The specified current is under the  $V_{CC}=5V$ ,  $25^{\circ}C$ ,  $f_v=60Hz$  (frame frequency) condition whereas mosaic pattern(black & white [8\*6] ) is displayed.

White: 255 Gray

Black: 0 Gray

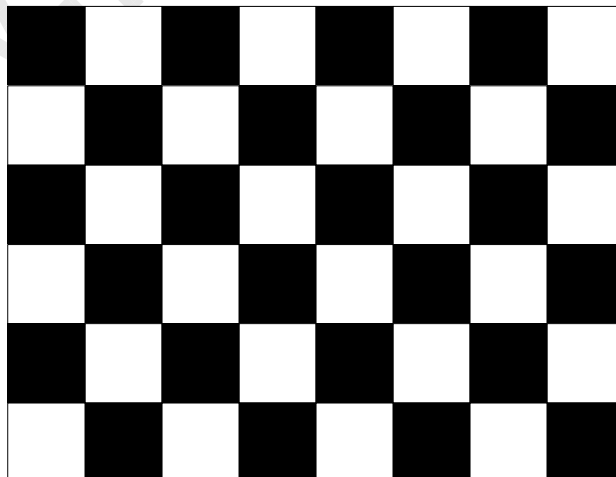


SPEC NO. MT215DW01 V.1

PAGE 11/24


Note 4: test condition :‘

(1)  $V_{DD} = 5\text{ V}$ ,  $V_{DD}$  rising time =  $470\text{ }\mu\text{s} \pm 10\%$ 


(2) Pattern: Mosaic pattern

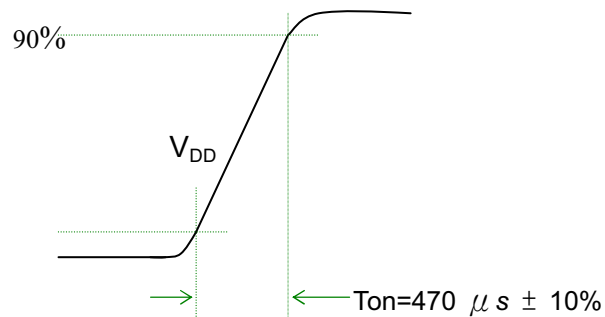

(3) Test circuit

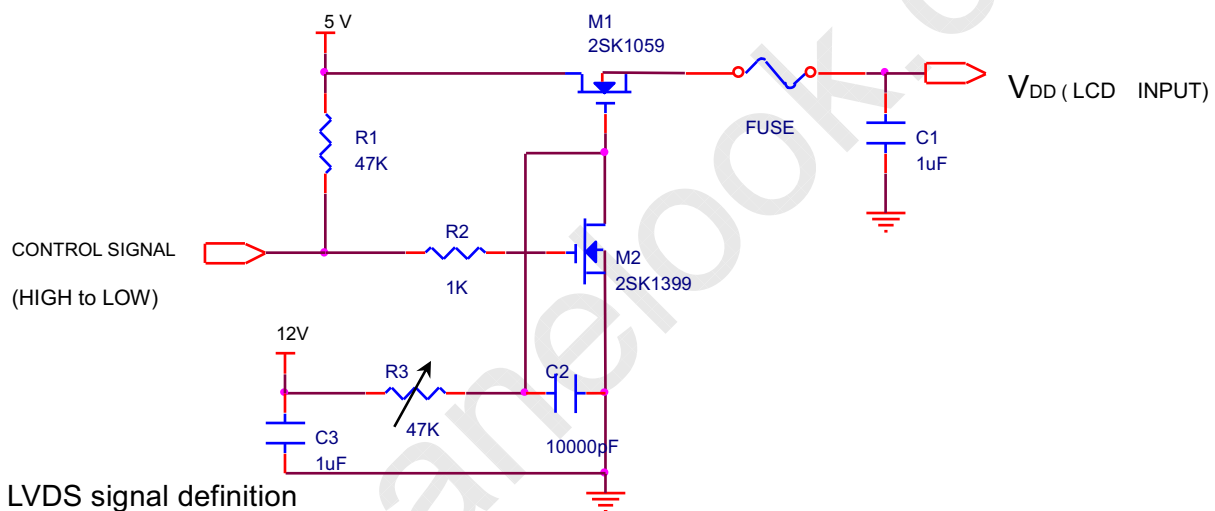


Note 5: LVDS signal definition

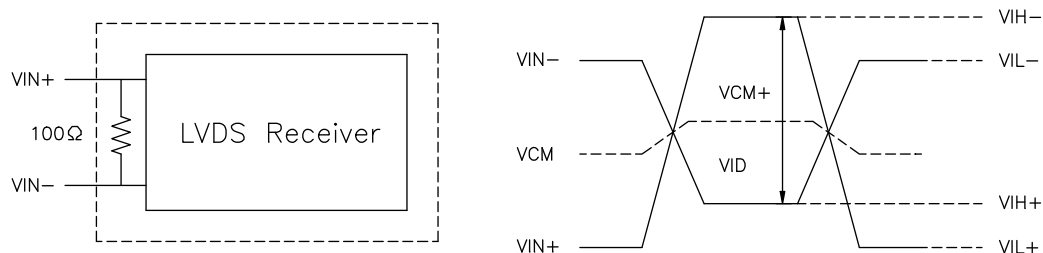 $VIN_+$  = Positive differential DATA & CLK Input $VIN_-$  = Negative differential DATA & CLK Input $VID = VIN_+ - VIN_-$ , $\Delta VCM = |VCM_+ - VCM_-|$ , $\Delta VID = |VID_+ - VID_-|$ , $VID_+ = |VIH_+ - VIH_-|$ , $VID_- = |VIL_+ - VIL_-|$ , $VCM = (VIN_+ + VIN_-)/2$ , $VCM_+ = (VIH_+ + VIH_-)/2$ , $VCM_- = (VIL_+ + VIL_-)/2$ ,

SPEC NO. MT215DW01 V.1

PAGE 12/24

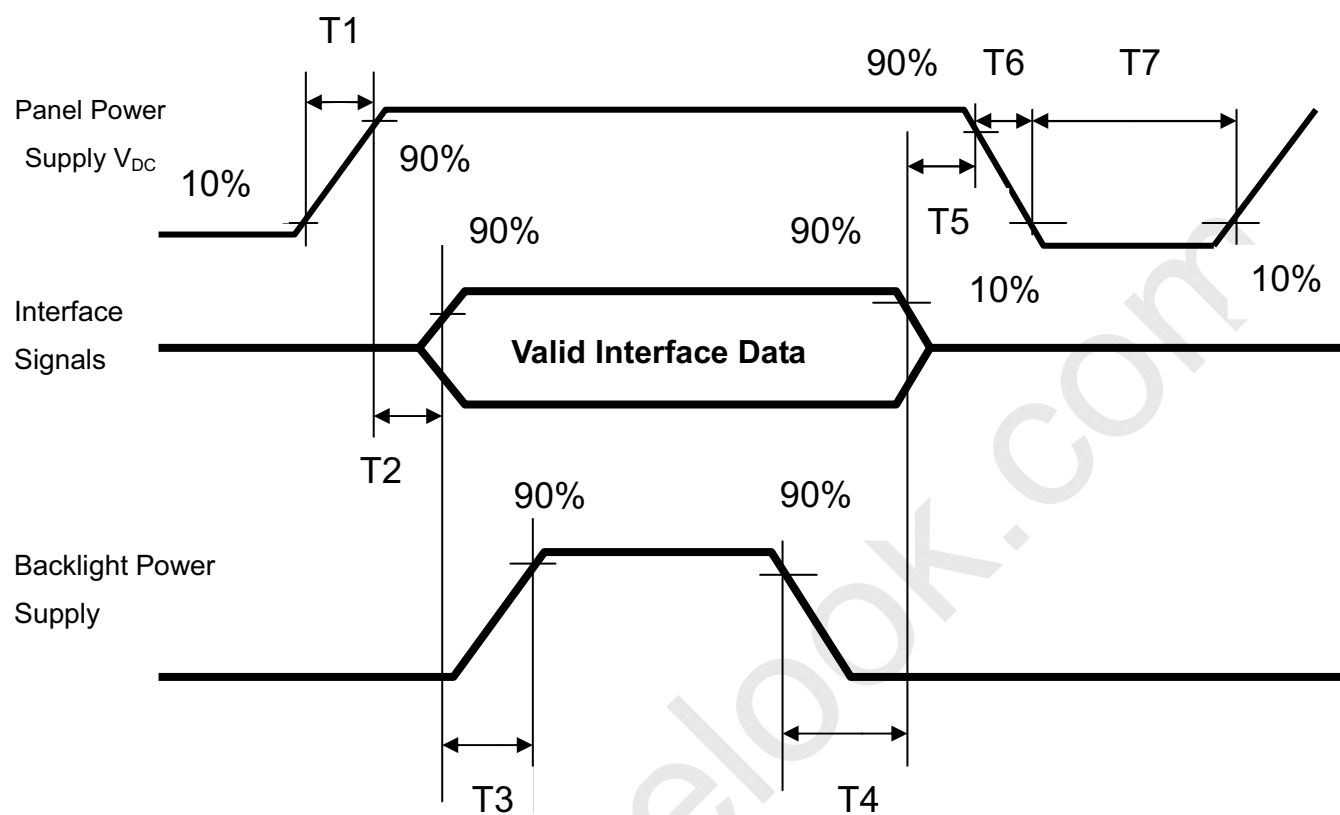Note 6: Power on sequence for LCD  $V_{DD}$ 

Parameter	Value			Unit
	Min	Typ	Max	
T1	0.1	-	10	ms
T2	0	30	50	ms
T3	200	250	-	ms
T4	100	250	-	ms
T5	0	20	50	ms
T6	0.1	-	50	ms
T7	1000	-	-	ms



SPEC NO. MT215DW01 V.1

PAGE 13/24

## b. Display color vs. input data signals

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Color		Input color data																							
		Red								Green								Blue							
		MSB				LSB				MSB				LSB				MSB				LSB			
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Red(000) dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(001)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(002)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255) bright	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green	Green(000)dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(002)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)bright	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue	Blue(000) dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(002)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255) bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1


## c. Input signal timing

Support Input Timing Table

	Item	Description	Min.	Typ.	Max.	Unit
Clock	Dclk	period	11.43	13.89	16.7	nS
		frequency	60	72	87.5	MHz
Vertical	$T_{V\_TOTAL}$	V total line number	1090	1100	1160	$T_{H\_TOTAL}$
	$T_{V\_DATA}$	Data duration	—	1080	—	$T_{H\_TOTAL}$
	$T_{VB}$	V-blank	10	20	80	$T_{H\_TOTAL}$
	$f_V$	frequency	50	60	75	Hz
Horizontal	$T_{H\_TOTAL}$	H total pixel number	1000	1088	1120	DClk
	$T_{H\_DATA}$	Data duration	—	960	—	DClk
	$T_{HB}$	H-blank	40	128	160	DClk

Note: Because this module is operated by DE only mode, Hsync and Vsync input signals should be set to low Logic level or ground. Otherwise, this module would operate abnormally.

## INPUT SIGNAL TIMING DIAGRAM

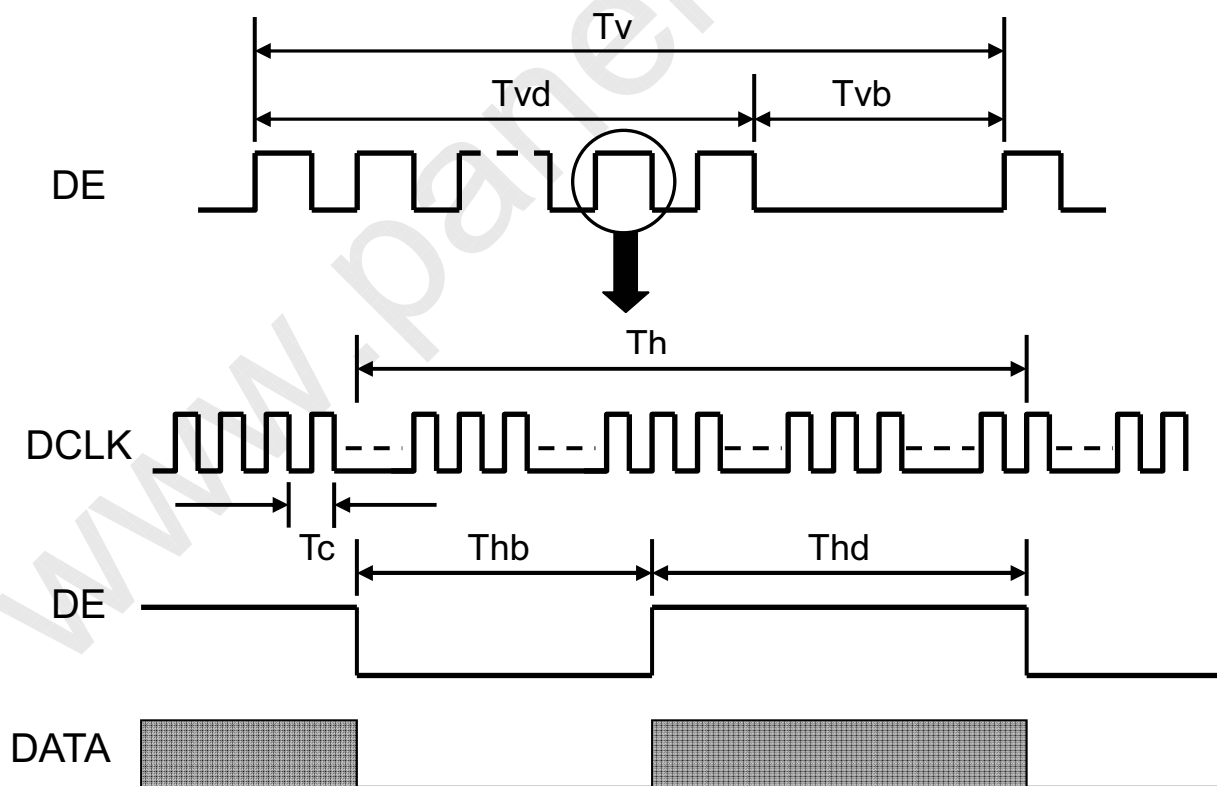



SPEC NO. MT215DW01 V.1

PAGE 15/24

## d. Display Position

D(1,1)	D(2,1)	... ..	D(960,1)	... ..	D(1919,1)	D(1920,1)
D(1,2)	D(2,2)	... ..	D(960,2)	... ..	D(1919,2)	D(1920,2)
.	.	... ..	.	... ..	.	.
D(1,540)	D(2,540)	... ..	D(960,540)	... ..	D(1919,540)	D(1920,540)
.	.	... ..	.	... ..	.	.
D(1,1079)	D(2,1079)	... ..	D(960,1079)	... ..	D(1919,1079)	D(1920,1079)
D(1,1080)	D(2,1080)	... ..	D(960,1080)	... ..	D(1919,1080)	D(1920,1080)

## e. Backlight Unit

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Light Bar Input voltage	VLED	-	36.3	37.4	VDC	(Duty 100%)
Light Bar Input current	ILED	-	360	396	mADC	Note 1,2,3
Power Consumption	PLED	-	13.07	14.81	W	Note 4
LED life time	LBL	30,000	-	-	Hrs	Note 5

Note 1: There are two Light Bars, and the specified current is input LED chip 100% duty current.

Note 2: The sensing current of each string is 60mA.

Note 3: Each light bar have three current sensing strings, so that each light bar input current is 180mA.

Note 4:  $PLED = ILED \times VLED$ .

Note 5: The life time is determined as the time at which luminance of the LED becomes 50% of the initial brightness or not normal lighting at  $ILED=360mA$  on condition of continuous operating at  $25\pm2^{\circ}C$ .

**C. Optical specifications**

Item	Symbol	Condition	Specification			Unit	Remark
			Min.	Typ.	Max.		
Response time	Tr	$\theta = 0^\circ$	-	1.5	3	ms	Note 4
	Tf		-	3.5	7		
	Tr+Tf		-	5	10		
Contrast ratio	CR	$\theta = 0^\circ$	700	1000	-		Note 3,5
Viewing angle	Top	$CR \geq 10$	70	80	-	deg.	Note 3,5,6
	Bottom	$CR \geq 10$	70	80	-		
	Left	$CR \geq 10$	75	85	-		
	Right	$CR \geq 10$	75	85	-		
Brightness (Center)	YL	-	200	250	-	nits	Note 3
Color chromaticity(CIE)	Wx	$\theta = 0^\circ$	-0.03	0.313	+0.03		Note 3
	Wy			0.329			
	Rx			0.642			
	Ry			0.345			
	Gx			0.326			
	Gy			0.624			
	Bx			0.150			
	By			0.059			
White uniformity (9)	$\delta_w$	-	0.70	0.75	-		Note 3,7
Cross talk(In 60HZ)	Ct	-	-	-	2%		Note 8

Note 1: Ambient temperature = 25°C.


Note 2: To be measured in dark room after backlight warm up 30 minutes.

Note 3: To be measured with a viewing cone of 2°by Topcon luminance meter BM-5A.

Note 4: Definition of response time:

The output signals of BM-7 are measured when the input signals are changed from “Black” to “White” (falling time) and from “White” to “Black” (rising time), respectively. The response time interval is between the 10% and 90% of amplitudes. Refer to figure as below.



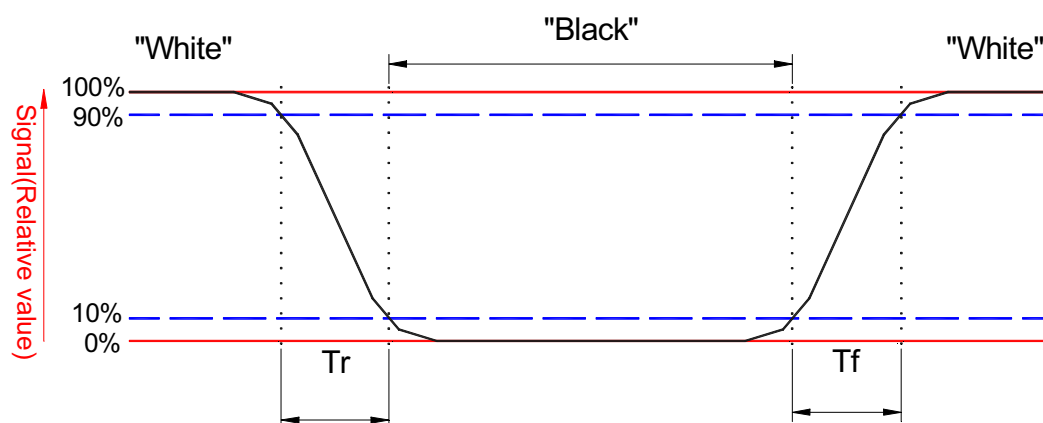


Note 5: Definition of contrast ratio:

Contrast ratio is calculated by the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "white" state}}{\text{Brightness on the "black" state}}$$

Note 6: Definition of viewing angle

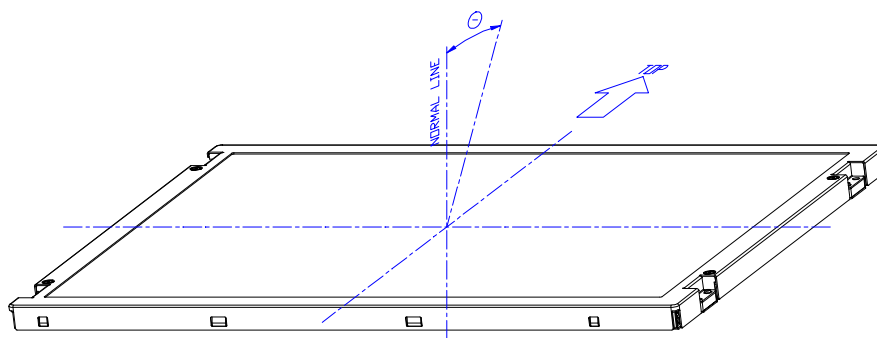


送

Note 7: Definition white uniformity:

Luminance are measured at the following nine points (P1~P9).


$$\delta_w = \frac{\text{Minimum Brightness of nine points (P1~P9)}}{\text{Maximum Brightness of nine points (P1~P9)}}$$

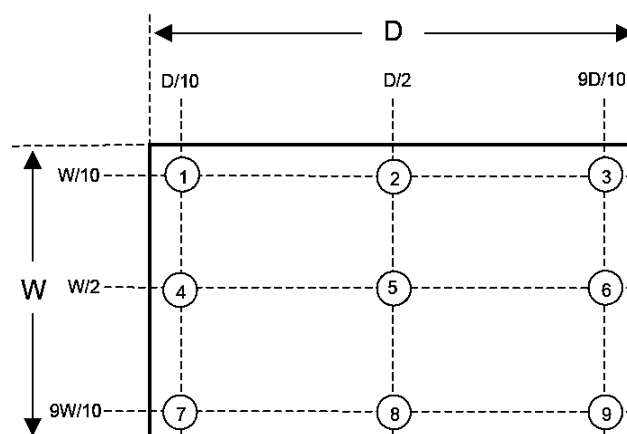

SPEC NO. MT215DW01 V.1

PAGE 18/24


Note 8:

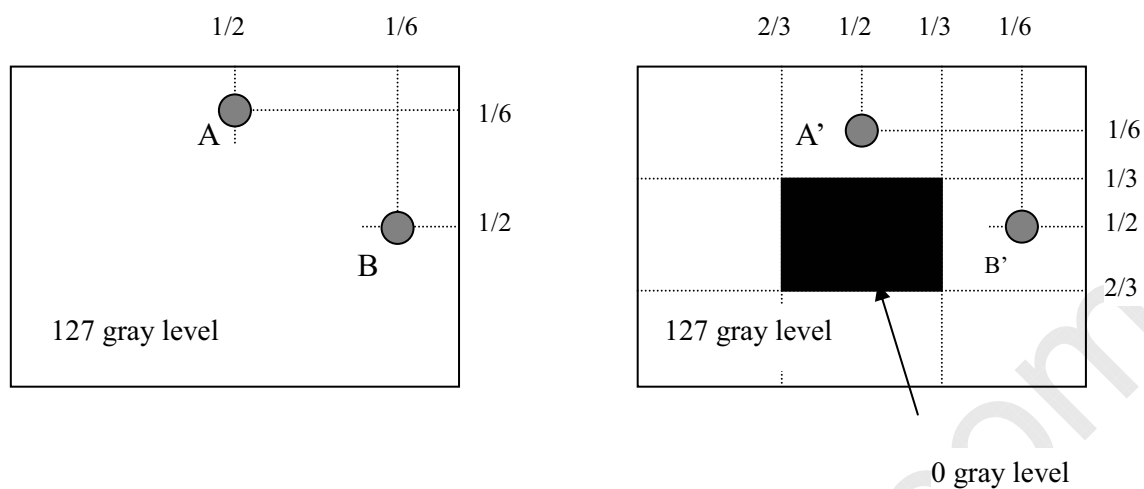

$$\frac{|L_A - L_{A'}|}{L_A} \times 100\% = 2\% \text{ max.}, L_A \text{ and } L_{A'} \text{ are brightness at location A and A'}$$

$$\frac{|L_B - L_{B'}|}{L_B} \times 100\% = 2\% \text{ max.}, L_B \text{ and } L_{B'} \text{ are brightness at location B and B'}$$

Note 10: Optical characteristic measurement setup.

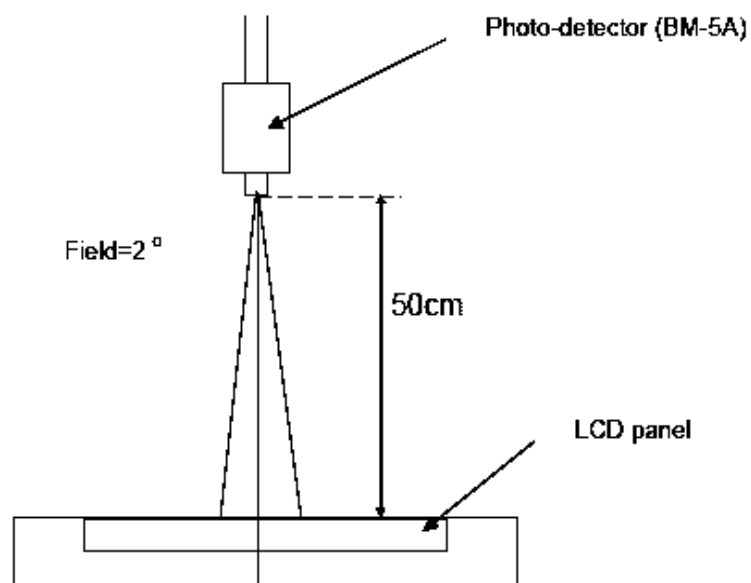

**D.Reliability test items**

Test Item	Test Condition	Judgment	Remark
High temperature storage	60°C, 240Hrs	Note 1	Note 2
Low temperature storage	-20°C, 240Hrs	Note 1	Note 2
High temperature & high humidity operation	40°C, 90%RH, 240Hrs (No condensation)	Note 1	Note 2
High temperature operation	50°C, 240Hrs	Note 1	Note 2
Low temperature operation	0°C, 240Hrs	Note 1	Note 2
Thermal Shock (non-operation)	-20°C~60°C -20°C /1Hr, 60°C /1Hr, 100cycles	Note 1	Note 2
Electrostatic discharge (ESD) (non-operation)	Contact: +/-8kV, 150pF(330ohms), 10 times/1 point, 1 time/1 sec, total 16 points Air discharge: +/-15kV, 150pF(330ohms), 10 times/1 point, 1 time/1 sec, total 9 points	Note 1	Note 2
Vibration (non-operation)	Vibration level : 1.5G Bandwidth : 10-300Hz Waveform : sine wave, sweep rate : 10min 30 min for each direction X, Y, Z (1.5 Hrs in total)	Note 1	Note 2
Mechanical Shock (non-operation)	Shock level : 50G, 11ms Waveform : Half sine wave Direction : ±X, ±Y, ±Z One time each direction	Note 1	Note 2
MTBF Demonstration	30,000 hours with confidence level 90%	Note 1	Note 3

Note1: Pass: Normal display image with no obvious non-uniformity and no line defect.

Partial transformation of the module parts should be ignored.

Fail: No display image, obvious non-uniformity, or line defects.

Note2: Evaluation should be tested after storage at room temperature for two hours.

Note 3: The MTBF calculation is based on the assumption that the failure rate distribution meets the Exponential Model (CCFL excluded).

## **E. Safety**

### **(1) Sharp Edge Requirements**

There will be no sharp edges or corners on the display assembly that could cause injury.

### **(2) Materials**

#### **a. Toxicity**

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible InnoLux Toxicologist.

#### **b. Flammability**

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process. The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

#### **c. Capacitors**

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

## **F. Display quality**


The display quality of the color TFT-LCD module should be in compliance with the Innolux's Incoming inspection standard.

## **G. Handling precaution**

The Handling of the TFT-LCD should be in compliance with the Innolux's handling principle standard.


SPEC NO. MT215DW01 V.1

PAGE 21/24

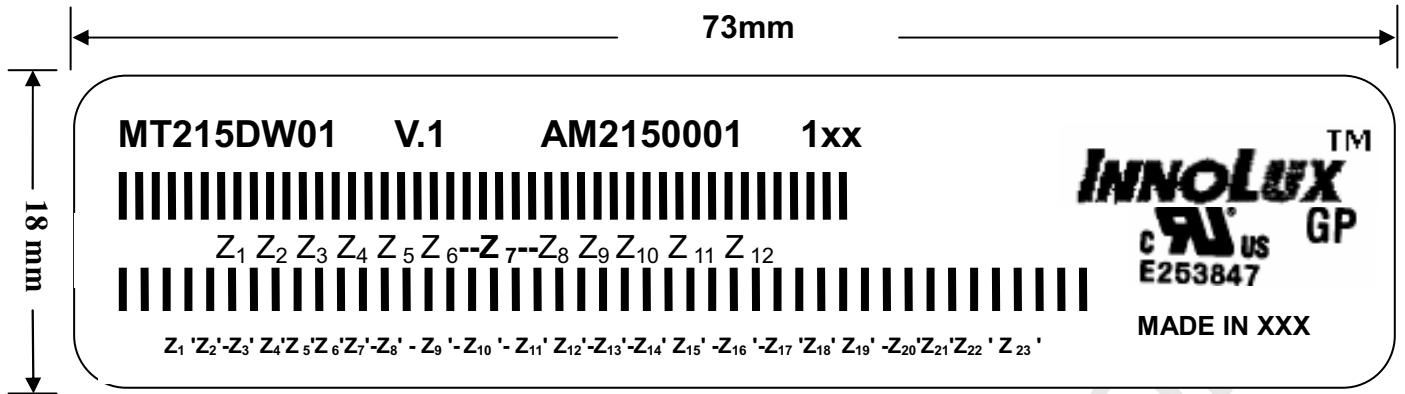**H. Label****(1) Module Label**

(a) Model Number: MT215DW01

(b) Version: V.1

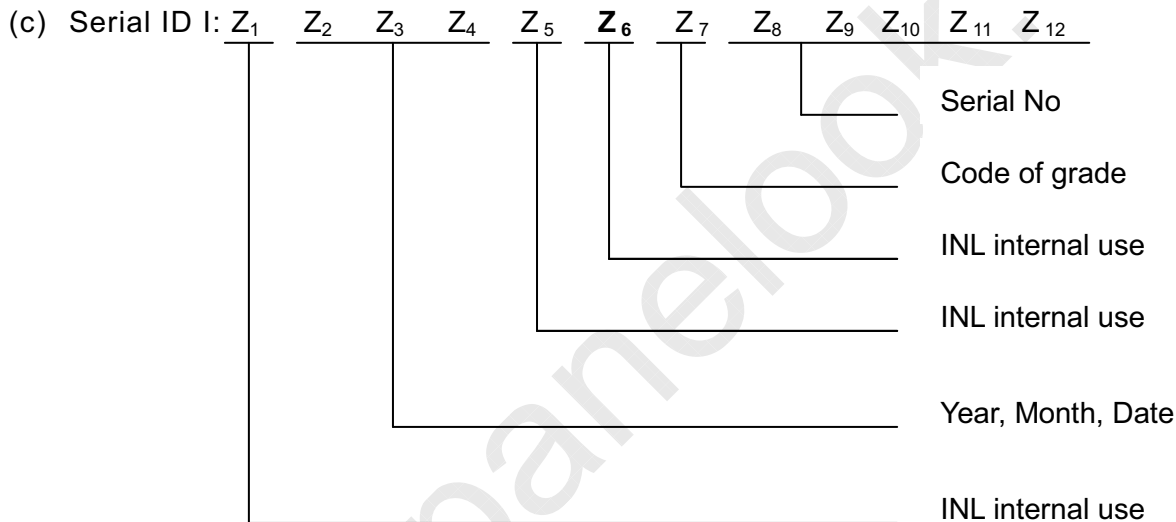

Serial ID includes the information as below:


1. Manufactured Date: Year: 0~9, for 2000~2009
2. Month: 1~9 & A~C for Jan.~Dec.
3. Date: 1~9 & A~Z (exclude I, O, Q, U) for 1st~31th
4. Code of grade: 1, 2, 3, 5, E
5. Serial No: Module manufacture sequence no

(d) Serial ID II (INL internal use)

SPEC NO. MT215DW01 V.1

PAGE 22/24


## (2) Carton Label

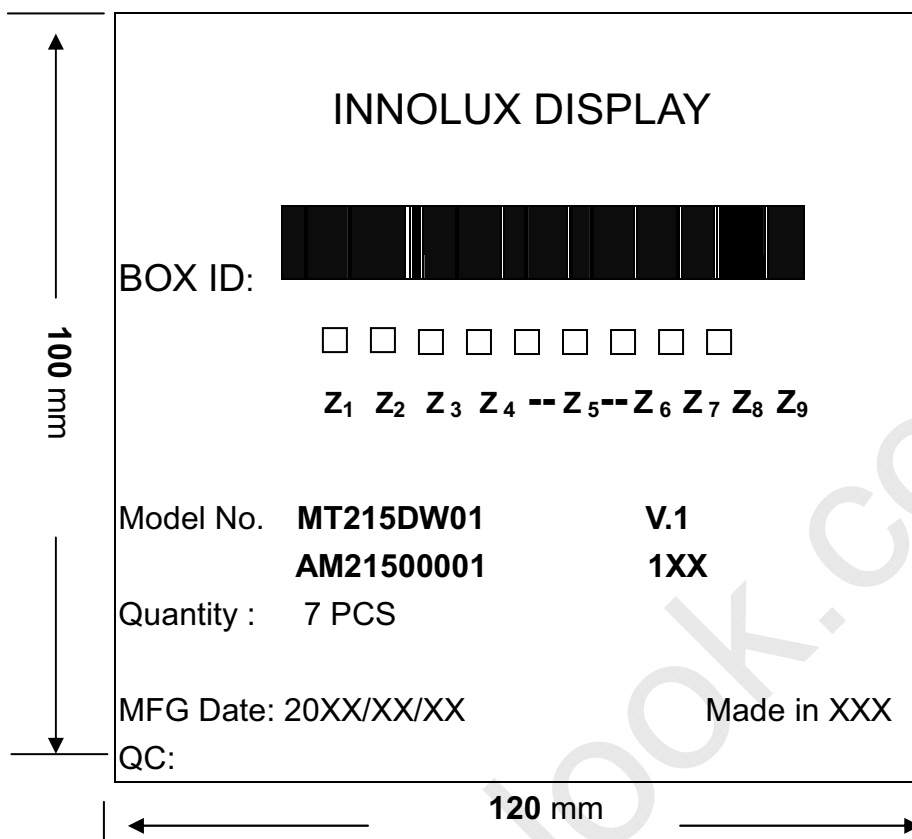

(a) Model Number: MT215DW01

(b) Version: V.1

(c) Packing quantity: 7 pcs

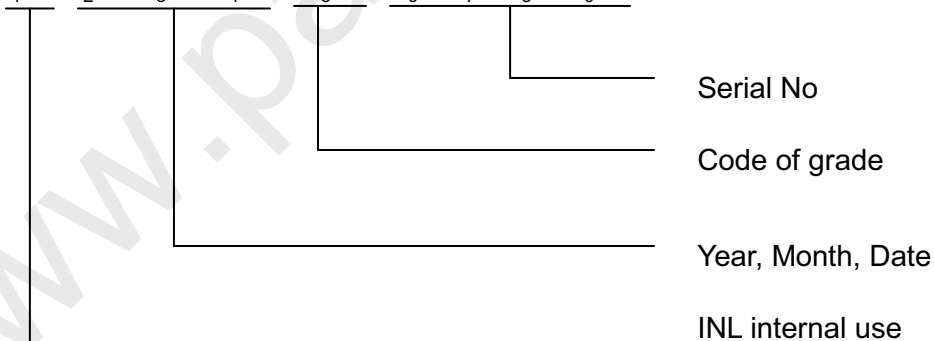(d) Serial ID: Z<sub>1</sub> Z<sub>2</sub> Z<sub>3</sub> Z<sub>4</sub> Z<sub>5</sub> Z<sub>6</sub> Z<sub>7</sub> Z<sub>8</sub> Z<sub>9</sub>

Serial ID includes the information as below:

(a) Manufactured Date: Year: 0~9, for 2000~2009

Month: 1~9 &amp; A~C for Jan.~Dec.

Date: 1~9 &amp; A~Z (exclude I, O, Q, U) for 1st~31th

(b) Code of grade: 1,2, 3, 5, E

(c) Serial No: Module packing sequence no



## (2) Back view

